



22M Fast Acting Type MICRO FUSE

TEST SPECIFICATION

% of Ampere Rating	Opening Time
100 %	4 hours, Minimum
150 %	10 min, Maximum
200 %	1min, Maximum

UL File No.

22M	125V 500mA-5A (Listed)
-----	------------------------

CSA Certified file No.

22M	125V 500mA-5A (Listed)
-----	------------------------


Interrupting Rating

125V 50A AC

RATINGS

22M Cat. No.	Ampere
0500 L	500mA
0600 L	600mA
0630 L	630mA
0750 L	750mA
0800 L	800mA
010 L	1A
013 L	1.25A
015 L	1.5A
016 L	1.6A
020 L	2A
025 L	2.5A
030 L	3A
032 L	3.15A
035 L	3.5A
040 L	4A
050 L	5A

L denotes for 125V

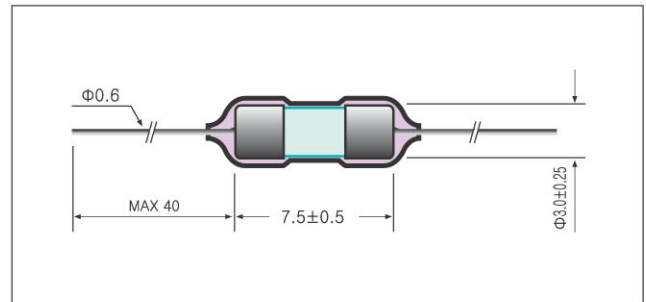

TIME-CURRENT CHARACTERISTICS

