

# 50CT IEC 127. Standard Sheet 5

## Time-Lag CERAMIC TUBE FUSE



### TEST SPECIFICATION

% of Ampere Rating	Ampere Rating	Opening Time
150 %	1 - 3.15	60 minutes, Minimum
	4 - 6.3	60 minutes, Minimum
210 %	1 - 3.15	30 minutes, Maximum
	4 - 6.3	30 minutes, Maximum
275 %	1 - 3.15	1 sec.,Min.; 80 sec. Max.
	4 - 6.3	1 sec.,Min.; 80 sec. Max.
400 %	1 - 3.15	.095 sec.,Min.; 5 sec. Max.
	4 - 6.3	.150 sec.,Min.; 5 sec. Max.
1000 %	1 - 3.15	.010 sec., Min.; .1 sec. Max.
	4 - 6.3	.020 sec., Min.; .1 sec. Max.

### UL File No. E236987

50CT	1A - 6.3A (Recognized)
------	------------------------

### CSA Certified file No. 1438084

50CT	1A - 6.3A (Recognized)
------	------------------------

### VDE File No. 40008066

50CT	1A - 8A
------	---------


### Breaking Capacity

1500A

### RATINGS

50CT Cat. No.	Ampere	Max. Voltage drop.mV
010 H	1A	250
013 H	1.25A	250
016 H	1.6A	200
020 H	2A	190
025 H	2.5A	180
032 H	3.15A	140
040 H	4A	100
050 H	5A	100
063 H	6.3A	100

H denotes for 250V

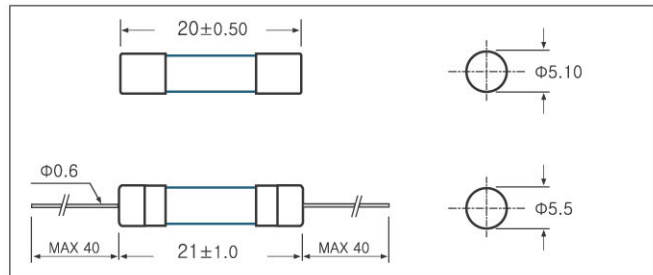

### TIME-CURRENT CHARACTERISTICS

