




61NM/62NM

GLASS TUBE FUSE (Non-time Delay)

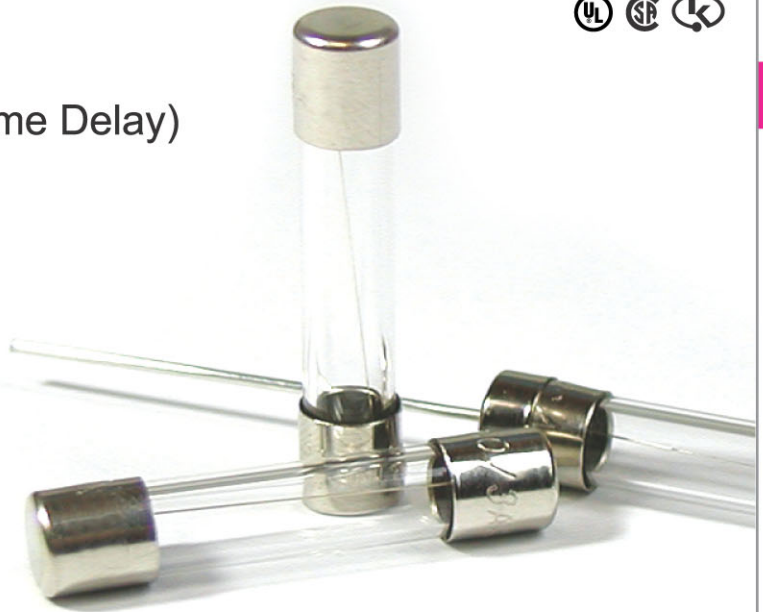

TEST SPECIFICATION

| % of Ampere Rating | Opening Time |
|--------------------|------------------|
| 110 % | 4 hours, Minimum |
| 135 % | 1 hour, Maximum |
| 200 % | 2 min, Maximum |

UL File No.

| | |
|------|------------------|
| 61NM | 125V 300mA - 10A |
| 62NM | 250V 300mA - 10A |

CSA Certified file No.

| | |
|------|------------------|
| 61NM | 125V 300mA - 10A |
| 62NM | 250V 300mA - 10A |


Interrupting Rating

| | |
|---------------------------------------|----------------------------------|
| 10,000 amperes at 125V AC (300mA-10A) | 35 amperes at 250V AC (300mA-1A) |
| 100 amperes at 250V AC (1.2A-3.5A) | 200 amperes at 250V AC (4A-10A) |

RATINGS

| 61NM, 62NM Cat. No. | Ampere |
|---------------------|--------|
| 0300 H/L | 300mA |
| 0315 H/L | 315mA |
| 0350 H/L | 350mA |
| 0375 H/L | 375mA |
| 0400 H/L | 400mA |
| 0500 H/L | 500mA |
| 0600 H/L | 600mA |
| 0630 H/L | 630mA |
| 0750 H/L | 750mA |
| 0800 H/L | 800mA |
| 010 H/L | 1A |
| 013 H/L | 1.25A |
| 015 H/L | 1.5A |
| 016 H/L | 1.6A |
| 020 H/L | 2A |
| 025 H/L | 2.5A |
| 030 H/L | 3A |
| 032 H/L | 3.15A |
| 035 H/L | 3.5A |
| 040 H/L | 4A |
| 050 H/L | 5A |
| 060 H/L | 6A |
| 063 H/L | 6.3A |
| 070 H/L | 7A |
| 080 H/L | 8A |
| 100 H/L | 10A |

H denotes for 250V
L denotes for 125V

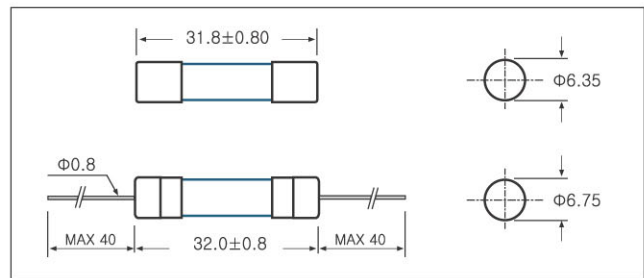

TIME-CURRENT CHARACTERISTICS

