

65TS

CERAMIC TUBE FUSE (Slow-Blow)



TEST SPECIFICATION


% of Ampere Rating	Opening Time
110 %	4 hours, Minimum
135 %	1 hour, Maximum
200 %	5 sec-2 minutes

UL File No.

65TS	125V 1A-15A (Listed) 16A-25A (Recognized) 250V 1A-15A (Listed)
------	---

CSA Certified file No.

65TS	125V 1A-15A (Listed) 250V 1A-15A (Listed)
------	--

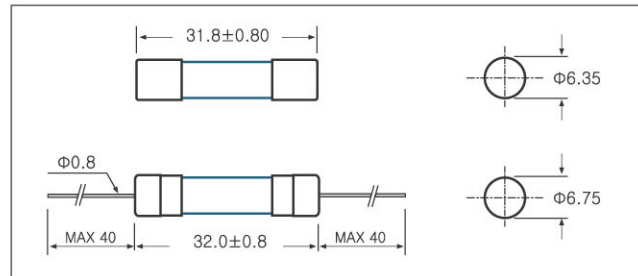

Interrupting Rating

10,000 amperes at 125V AC (1A-25A)	100 amperes at 250V AC (1A-3.5A)
200 amperes at 250V AC (4A-10A)	750 amperes at 250V AC (12A-15A)

RATINGS

65TS Cat. No.	Ampere
010 H/L	1A
013 H/L	1.25A
015 H/L	1.5A
016 H/L	1.6A
020 H/L	2A
025 H/L	2.5A
030 H/L	3A
032 H/L	3.15A
035 H/L	3.5A
040 H/L	4A
050 H/L	5A
060 H/L	6A
063 H/L	6.3A
070 H/L	7A
080 H/L	8A
100 H/L	10A
120 H/L	12A
130 H/L	13A
150 H/L	15A

H denotes for 250V
L denotes for 125V

TIME-CURRENT CHARACTERISTICS

